

# HF701 TX/RX

## 7 m two-part LF/HF Fibreglass Antenna with 1"-14NF threaded base

- High quality 7 m high HF antenna for professional use
- Designed for GMDSS installations
- Rugged design
- Chrome plated solid brass joints
- Designed for mounting with 4-Way Mount and Upper Support Bracket (not supplied) for easy lay down function
- Side fed via open single wire
- Full omni-directional radiation pattern

**Electrical Specifications:**

Frequency	1.4 - 30 MHz (MF and HF)
Polarisation	Vertical
Max. Power	1000 W PEP
Static Capacitance	80 pF
Insulation Resistance	10 GOhm
Electric Length	6820 mm


**Mechanical Specifications:**

Color	White
Height	7 m
Diameter	Ø 21 to Ø 5 mm
Mounting	On deck/wall with ratchet mount and upper support bracket (not supplied!)
Materials	PU-painted heavy duty glass-fibre tubes and chromed solid brass
Operating temperature	-40C to +60C
Connector 1	Screw terminal
Cable	No cable supplied (Use open single wire)
Mounting place	Deck/wall mounting
Mounting Instruction	Supplied
Serial no.	On product label

**Ordering information:**

P/N 13702-082

SCAN ANTENNA A/S | LITERBUEN 15 | DK-2740 SKOVLUNDE | DENMARK | TEL. +45 4333 1620

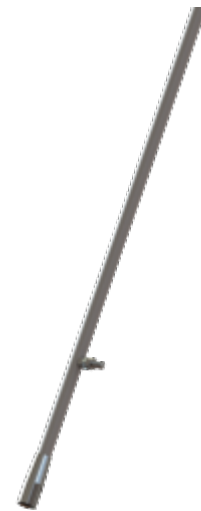

Datasheet 2 / 2

Packing information:

Packing	Carton tube
Size	Ø 60 x 4000 mm

Outline Drawing



Mounting

