

HF9000 TX/RX

9 m three-part LF/HF Fibreglass Antenna

- High quality 9 m high HF antenna for professional use
- Designed for GMDSS installations
- Rugged design
- Chrome plated solid brass joints
- Designed for rail mounting
- Side fed via open single wire
- Full omni-directional radiation pattern

Electrical Specifications:

Frequency	1.4 - 30 MHz (MF and HF)
Polarisation	Vertical
Max. Power	1200 W PEP
Static Capacitance	100 pF
Insulation Resistance	10 GOhm
Electric Length	7870 mm

Mechanical Specifications:

Color	White
Height	9 m
Diameter	Ø 40 to Ø 5 mm
Mounting	Rail Bracket Kit (Large) P/N 10000-163 (Not supplied!)
Materials	PU-painted heavy duty glass-fibre tubes and chromed solid brass
Operating temperature	-40C to +60C
Connector 1	Screw terminal
Cable	No cable supplied (Use open single wire)
Mounting place	On rail or pole (Ø 30 - 90 mm)
Mounting Instruction	Supplied
Serial no.	On product label

Ordering information:

P/N	13900-002 (Without brackets)
-----	------------------------------




Datasheet 2 / 2

Packing information:

Packing	Carton tube
Size	Ø 86 x 4000 mm

Outline Drawing

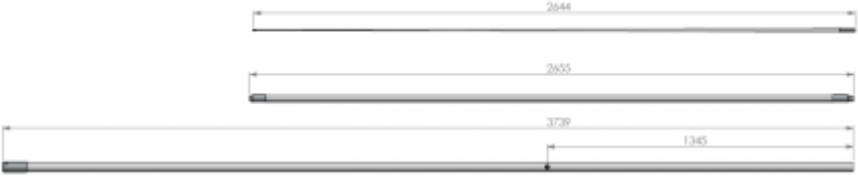

Mounting

