

Iridium Passive Omnidirectional SATCOM Antenna

Certified passive Iridium antenna

- Passive Antenna for Iridium terminals
- Well suited for Iridium GO!
- Requires no pointing towards satellite
- Low loss radome
- Mounts on any US-style Mounting Bracket with 1"-14NF threaded stud (not supplied)

Note: Cable loss below 3 dB is recommended

Iridium GO! - see "Ordering Information" below for prepackaged antenna kit



[Link to: Iridium Product Page](#)

Electrical Specifications:

Frequency	1616 - 1626.5 MHz (L-band)
Satellite System	Iridium
Impedance	50 ohm
Polarisation	RHCP
Axial ratio	< 6 dB
Gain	2 dBic
VSWR	< 1.5



Mechanical Specifications:

Color	White (non-glossy)
Height	150 mm (191.5 mm mounting base included)
Diameter	Ø 95 mm
Mounting	On any US-style Mounting Bracket with 1"-14NF threaded stud (not supplied)
Materials	ASA, copper, PCB, stainless steel and brass
Operating temperature	-40C to +85C
Connector 1	N-female
Cable	No cables supplied
Mounting place	On marine vessel or landbased vehicle


Ordering information:

P/N	65000-001 (Antenna only - in polybag)
P/N	65000-013 (Complete kit for Iridium GO! (Antenna + Adapter Cable + 5 m cable) - in hardbox)
P/N	65000-023 (Complete kit for Iridium GO! (Antenna + Adapter Cable + 8 m cable) - in hardbox)
P/N	91006-011 (Adapter Cable for Iridium GO! (150 mm + TNC(f)) - in polybag)
P/N	91003-010 (Cable 5 m LTR195 N(m) + TNC(m) - bulk packing)
P/N	91003-020 (Cable 8 m LTR240 N(m) + TNC(m) - bulk packing)
P/N	91003-030 (Cable 10 m LTR400 N(m) + TNC(m) - bulk packing)
P/N	91003-040 (Cable 15 m LTR400 N(m) + TNC(m) - bulk packing)


Packing information:

Packing	Polybag or hardbox (See "Part No.")
---------	-------------------------------------

Outline Drawing

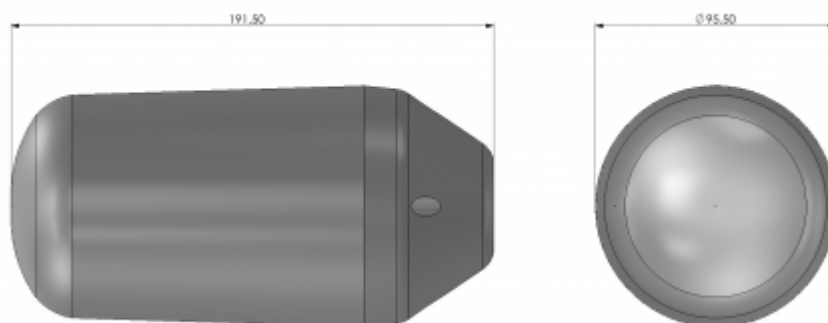

65000-000 Radiation pattern

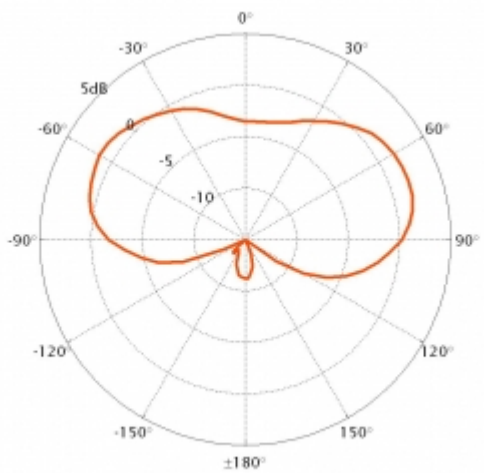

65000-000 VSWR

